

Automatic and manual eyelet insertion machines



Twin head eyeletting machine PiccoStar 102-60





Tradition in perfection

Piccolo and PiccoStar

- Can be used for paper, cardboard, plastics, etc.
- Ideal for contracts, certificates and labels
- Eyeletting machines for manual operation or stand with foot switch as well as electrical drive
- Automatic eyelet infeed
- Punches holes and inserts eyelets in a single working step (the eyelet punches the hole)
- Material support with side and rear gauges
- Optional: adjustable support for different formats (models 102-00/-04/-15/-20/-28)

Piccolo 102-00 / 102-20

- Single head eyeletting machine
- Manual operation / stand with foot pedal
- Available for **one** eyelet diameter, 4 mm or 5.5 mm (5.5 mm suitable for filing documents)
- With self-punching eyelets up to 20 sheets with 80 gsm paper or material thickness up to 2 mm
- Expandable for one more eyelet size from 3 – 7.5 mm



Model 102-00 / 102-04



Model 102-15

Piccolo 102-04 / 102-28

- Single head eyeletting machine
- Manual operation / stand with foot pedal
- Available for **one** eyelet size with an inner diameter in the range of 3 – 7.5 mm
- With self-punching eyelets: up to 30 sheets with 80 gsm paper or material thickness up to 3 mm
- With pre-punched material: up to 80 sheets with 80 gsm paper or material thickness up to 8 mm
- Easily convertible for one other eyelet type from 3 – 7.5 mm

Piccolo 102-15

- Twin head eyeletting machine
- Manual operation
- Fixed distance between centers 80 mm
- Available for **one** eyelet size with an inner diameter in the range of 3 – 7.5 mm
- With self-punching eyelets: up to 30 sheets with 80 gsm paper or material thickness up to 3 mm
- With prepunched material: up to 50 sheets with 80 gsm paper or material thickness up to 5 mm
- Supporting table and adjustable rear and side gauges guarantee exact positioning



Model 102-20 / 102-28

PiccoStar – Fast, precise and effortless

PiccoStar 102-50: Single head eyeletting machine

PiccoStar 102-60: Twin head eyeletting machine with fixed centers of 80 mm

- Electrical drive
- Automatic eyelet infeed
- Set up for **one** eyelet size with an inner diameter in the range of 3 – 7.5 mm
- Punches holes and inserts eyelets in a single working step (the eyelet punches the hole)
- With self-punching eyelets: up to 30 sheets with 80 gsm paper or material thickness up to 3 mm
- With pre-punched material: up to 50 sheets with 80 gsm paper or material thickness up to 5 mm
- Supporting table and adjustable rear and side gauges guarantee exact positioning
- Release by button
- Optional: electric foot switch

By using eyeletting machines from Hang, important documents of up to 50 pages can be made forgery-safe and non-changeable unless destroyed (passports, policies, contracts).



Model 102-50




Model 102-60

Technical data

	102-00 / -20	102-04 / -28	102-15	102-50	102-60
Working depth	80 mm	80 mm	80 mm	60 mm	60 mm
Tension				230 V, 50 Hz	230 V, 50 Hz
Width	400 / 500 mm	400 / 500 mm	550 mm	400 mm	580 mm
Depth	335 / 500 mm	335 / 500 mm	340 mm	555 mm	555 mm
Height	380 / 1200 mm	380 / 1200 mm	360 mm	370 mm	390 mm
Weight (net)	10 / 25 kg	10 / 25 kg	20 kg	40 kg	50 kg
Weight (gross)	11 / 30 kg	11 / 30 kg	25 kg	45 kg	60 kg

Standard eyelets for paper industry

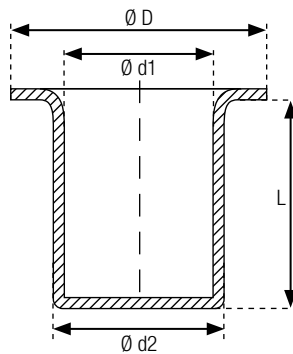

Article	Eyelets												
	24	25	26	8E 3 mm	8E 4 mm	8E 5 mm	9E	269	270	271	272	273	904 Plastic
D	6.7	6.6	6.6	8	8	8	11.3	10	10	10	10	10	8.5
d1	4.6	4.7	4.8	6.2	6.2	6.2	8.3	5.7	5.8	6.7	6.7	6.9	5.4
L	2.9	3.8	5.7	3	4	5	3.8	5.3	6.9	7.2	4.9	10	4
d2	4	4	4	5.5	5.5	5.5	7.5	5	5	5	5	6	4.5

Special dimensions upon request

Article	Eyelets		Sheet										
	24	25	26	8E 3 mm	8E 4 mm	8E 5 mm	9E	269	270	271	272	273	904 Plastic
Piccolo 102-00 / -20	2 – 15	2 – 20		2 – 15	2 – 20								
Piccolo 102-04 / -28			10 – 25		2 – 20	5 – 25	2 – 20	5 – 30	10 – 30s 30 – 50v	10 – 30s 30 – 50v	5 – 30	40 – 80v	2 – 20v
Piccolo 102-15	2 – 15	2 – 20	10 – 25	2 – 15	2 – 20	5 – 25	2 – 20	5 – 30	10 – 30s 30 – 50v	10 – 30s 30 – 50v	5 – 30		
PiccoStar 102-50	2 – 15	2 – 20	10 – 25	2 – 15	2 – 20	5 – 25		5 – 30	10 – 30s 30 – 50v		5 – 30		
PiccoStar 102-60	2 – 15	2 – 20	10 – 25	2 – 15	2 – 20	5 – 25		5 – 30	10 – 30s 30 – 50v		5 – 30		

s = self-punching v = pre-punched

hang ○ ○ ●
Requirement. Competence. Perfection.

Constantin Hang Maschinen-Produktion GmbH

Jahnstrasse 82
73037 Göppingen
Germany

Phone: +49 (0) 7161 / 6005 - 0
Fax: +49 (0) 7161 / 6005 - 78
E-Mail: info@hang.de